

Resistors


MResist SUPREME

With our **MResist SUPREME** you can enjoy even finest details and spatial information which normally get lost. Due to the complex bifilar structure from 1Ω with two wires being wound around the high-temperature-resistant cement element simultaneously the inductance is always below 0,075μH

In addition, the **MResist SUPREME** series features acoustic neutrality and music reproduction close to reality. This is due to a special manually applied fire-resistant casting compound which optimally fixes and stabilises the resistor winding thus protecting it against microphony effects.

In order to maintain high sound quality even at high load, we apply a special copper-nickel alloy as conducting material featuring a positive and extremely low temperature coefficient of only **50ppm/°C**.

Further details which guarantee that **MResist SUPREME** resistors are hardly noticeable anymore are the use of non-magnetic materials and welded contacts.

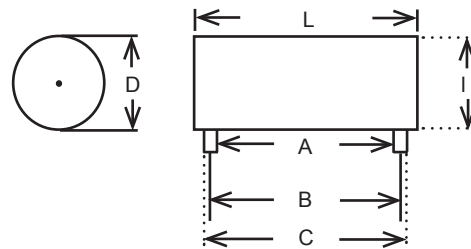

Type	D [mm]	L [mm]	Wire Ø * l [mm]	A [mm]	B [mm]	C [mm]
MRES20	11	51	1.0 * 30	32	39	45

MRES20

Audiophile-resistors, non-magnetic, non-inductive, 50ppm/°C, 20 watt

Ohm [Ω] ±2%
0,10
0,22
0,33
0,47
0,68
1,0
1,2
1,5
1,8
2,2
2,7
3,3
3,9
4,7
5,6
6,8
8,2
10
12
15
18
22
27
33
39
47