# **AUDIO SOLUTION**

SERIES A47



# **Product description**

#### **MAIN FEATURES**

high resolution series audio attenuator With 47 positions

- > 47 positions with selectable end stops
- > Low profile: 36 x 36 mm
- > Up to 6 channels
- Available with pre-populated thin-film SMT resistors or non-populated THT versions
- > 600 ohm, 10 k , 25 k, 50 k or 100 k ohm standard input impedances
- > Exceptional sonic performance with precise switch feel
- > Low-bounce contact system with 3 µm gold plating
- > Free Excel resistor calculator tool available







### **PRODUCT VARIETY**

- Two-channel SMT version
- Two-channel THT version (supplied non-populated)

## **POSSIBLE CUSTOMIZATIONS**

Shafts, concentric construction

## **TYPICAL APPLICATIONS**

- Mixing desks and outboard studio equipment
- Home audio and home theater

### **DESCRIPTION**

The A47 audio switch series incorporates a PCB based switch contact system that is specifically designed to meet audio-phile requirements for superb sonic performance. These series attenuators provide 47 positions and are available from 1 to 6 channels. Switch torques of 1.5, 2.5 and 5 Ncm are available standard, populated with low-noise, high precision SMT resistors (standard input impedances are 600 ohm, 10 k, 25 k, 50 k or 100 k ohm) or non-populated THT versions (can be populated by the customer).

The A47 series feature Elma's hallmark indexing feel for superior tactile feedback.

<sup>\*</sup> Pictured with resistors, is supplied non-populated


## **AUDIO SOLUTION**


SERIES A47



# Dimensions, pin assignment and circuit diagram


## **SWITCH DESIGN**





1 wafer L = 24.5 2 wafers L = 42.0 3 wafers L = 59.5 4 wafers L = 77.0 5 wafers L = 94.5 6 wafers L = 112.0

### PIN ASSIGNMENT AND CIRCUIT DIAGRAM




## **FRONT PANEL CUT OUT**




## **NUT**

HEX NUT



LOCK WASHER




# **AUDIO SOLUTION**

SERIES A47



# **Ordering information**

### **ORDERING CODE**

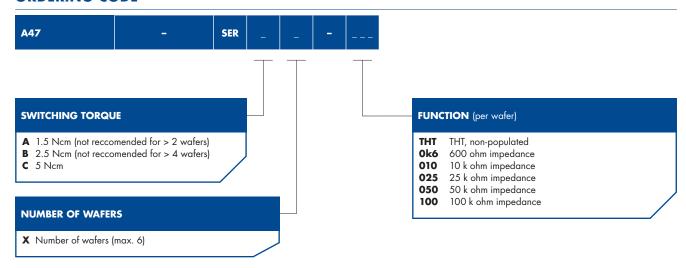

### **PACKAGING**

Single piece packed, lock washer and two nuts are included

### **ACCESSORIES AND SPARE PARTS**

Spare nut: Part number 5622-16

Stop screws: 10 pieces / bag, part number 4124-21

## **SPECIFICATIONS**

## GENERAL

Indexing resolution:	47 positions (7.5° indexing   345° total switch travel)
Switching torque:	1.5, 2.5 or 5 Ncm (±30 % over temperature range and life)
Rotational life:	25'000 cycles (over temperature range, at 120 RPM)
Contact system:	Low-bounce wiper with 3 µm hard gold plated PCB
SMT resistors:	0805 package, thin-film, ±0.1 %, TCR; ±25 ppm / °C
THT resistors:	Non-populated, max. package size, Æ2.8 x 10 mm (Æ0.6 mm wire)
Input impedance:	10 k, 25 k, 50 k, 100 k or 600 ohm

#### **DB ATTENUATION (SERIES TYPE ATTENUATORS)**

SWITCH POSITION	1	2	3	4	i e	5	6		7	8	9	,	10	•••	47
Attenuation (dB)	Off	-72	-69	-6	6 -	64	-62	2 -0	50	-58.5	-5	7 6	5.5		0
Step size (dB)			3	3	2	2		2	1.	5	1.5	1.5		1.5	

Copyright 2018 by Elma Electronic AG, CH-8620 Wetzikon. Subject to technical modifications, all data supplied without liability.

#### Please contact our sales team for more details.

China: +86 21 5866 5908 Germany: +49 7231 97 34 0 Singapore: +65 6479 8552 United Kingdom: +44 1234 838 822 France: +33 388 56 72 50 Israel: +972 3 930 50 25 Switzerland: +41 44 933 41 11 United States: +1 510 656 3400